



## VOLANT 55 & 66

CHANDELIER

Volant is a modern chandelier that's almost akin to a kinetic sculpture. A static lamp with a mystifying ability to appear in motion. Solid brass bars are home to textured, tubular formed glass elements, angled to give the impression of floating objects revolving around each other. The result is an elegant equilibrium that's at once enthralling yet soothing.

### AVAILABLE FINISHES




### TECHNICAL

MATERIAL	TREATED BRASS, GLASS	CERTIFICATION	AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN ETL/UL CERTIFICATION PENDING
FINISH	ALL BRASS FRAMES ARE BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN WAXED TO PREVENT ACCELERATED AGING.	CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) VC555 - 22W, 3050-3550 LUMEN, 2700K VC666 - 26.4W, 3660-4020 LUMEN, 2700K WATTAGE AND LUMEN OUTPUT WILL VARY SLIGHTLY DEPENDING ON CONSTANT CURRENT OUTPUT.	PRODUCT SKU CODE	EG. VC666.G-FLU.BR-BRZ VOLANT 666 CHANDELIER IN FLUTED CLEAR GLASS WITH A BRONZED BRASS FRAME  VC555.G-XXX.BR-XXX VOLANT 555 CHANDELIER VC666.G-XXX.BR-XXX VOLANT 666 CHANDELIER
220-240V REGIONS	DIMMING OPTIONS · PHASE - DIMMING RANGE 5 - 100% · DALI - DIMMING RANGE 1 - 100%	FINISHES	GLASS FROSTED BLACK (G-FBL) FLUTED (G-FLU) FROSTED FLUTED (G-FFL) FRAME BRUSHED BRASS (BR-NAT) BLACKENED BRASS (BR-BLK) BRONZED BRASS (BR-BRZ)
110-120V REGIONS	DIMMING OPTIONS · PHASE - DIMMING RANGE 3 - 100% · DALI - DIMMING RANGE 0.1 - 100%	WEIGHT	VC555 35KG / 77LB VC666 42KG / 93LB
	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.  FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.	PACKAGING WEIGHT	VC555 2 X 16KG / 35LB, 1 X 9KG / 20LB 1 X 3KG / 6.6LB VC666 3 X 16.5KG / 36.5LB, 1 X 3KG / 6.6LB
LED LIFESPAN	50,000 HRS	PACKAGING SIZE	VC555 3 X L 192CM W 37CM H 19CM / L 6'4" W 1'3" H 8" 1 X L 50CM W 50CM H 25CM / L 1'8" W 1'8" H 10" VC666 3 X L 192CM W 37CM H 19CM / L 6'4" W 1'3" H 8" 1 X L 50CM W 50CM H 25CM / L 1'8" W 1'8" H 10"
IP RATING	IP20 - FOR INDOOR USE ONLY		


twentieth

sales@twentieth.net  
323.904.1200  
www.twentieth.net

## DIMENSIONS

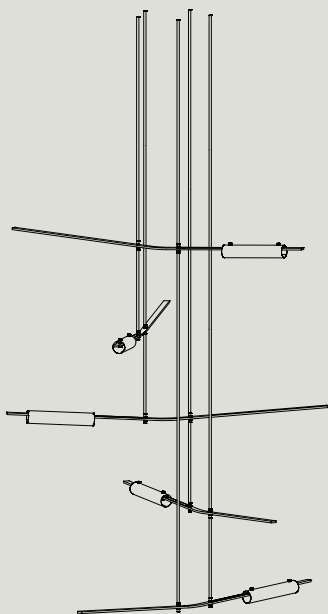

VC555  
L 1790 W 1720 H 2090  
L 5'10" W 5'8" H 6'10"  
MIN DROP HEIGHT - H 2590 / 8'6"

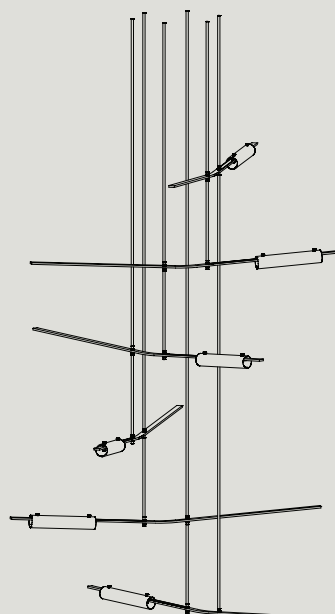

VC666  
L 1790 W 1790 H 2580  
L 5'10" W 5'10" H 8'6"  
MIN DROP HEIGHT - H 3080 / 10'1"

\*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION.  
\*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED THE CIRCULAR CANOPY WILL BE SUPPLIED.

CIRCULAR



CIRCULAR  
FIXED CANOPY  
CAN.VC.CIR.X-XXX  
Ø600 X 37MM / 23.6" X 1.5"  
DRIVER HOUSED IN CANOPY



CIRCULAR  
FIXED SWIVEL CANOPY  
CAN.VC.CIR.SW.X-XXX  
Ø600 X 37MM / 23.6" X 1.5"  
DRIVER HOUSED IN CANOPY

INDIVIDUAL CANOPY



SLIM  
Ø14MM FIXED CANOPY  
CAN.SL.F14.X-XXX  
Ø120 X 7MM / 4.7" X 0.3"  
DRIVER HOUSED IN CEILING



SLIM  
Ø14MM FIXED SWIVEL CANOPY  
CAN.SL.F14.SW.X-XXX  
Ø120 X 7MM / 4.7" X 0.3"  
DRIVER HOUSED IN CEILING



PUCK  
Ø14MM FIXED CANOPY  
CAN.PK.F14.X-XXX  
Ø50 X 65MM / 2" X 2.6"  
DRIVER HOUSED IN CEILING



PUCK  
Ø14MM FIXED SWIVEL CANOPY  
CAN.PK.F14.SW.X-XXX  
Ø50 X 65MM / 2" X 2.6"  
DRIVER HOUSED IN CEILING

TECHNICAL

MATERIAL

BRASS / POWDER COATED BRASS



BRUSHED BRASS



BLACKENED BRASS



BRONZED BRASS



WHITE POWDERCOATED

CANOPY FINISH

BRUSHED BRASS (BR-NAT)  
BLACKENED BRASS (BR-BLK)  
BRONZED BRASS (BR-BRZ)  
POWDERCOATED WHITE (C-WHT)\*

PRODUCT SKU CODE

EG. CAN.VC.CIR.SW.BR-NAT = CIRCULAR FIXED SWIVEL CANOPY CANOPY IN BRUSHED BRASS FINISH

\*CIRCULAR CANOPIES ONLY

twentieth

sales@twentieth.net  
323.904.1200  
www.twentieth.net