



## CONTENTS


Bauer C1

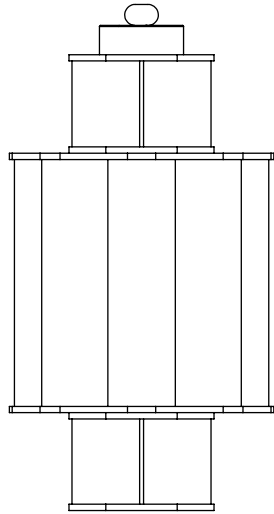

Stem and 1/8 IPS  
Threaded Rod



Driver




Hangstraight




8/32 J-Box Screws




Crossbar



Canopy



Driver Plate




## SAFETY INFORMATION

Only suitable for direct mounting on non-combustible surfaces.  
Under no circumstances can Bauer Chandeliers be mounted on normally flammable surfaces.  
Suitable for dry, indoor use only.  
Maximum ambient temperatures: 25° C

## BAUER CHANDELIER | CEILING INSTALLATION

*Note: Please contact a licensed electrician.*

1. To customize the length of the provided 36-inch stem, you may cut to desired length. Then cut the inner all-thread tube to the same length plus 1/2 inch to allow room for threading.

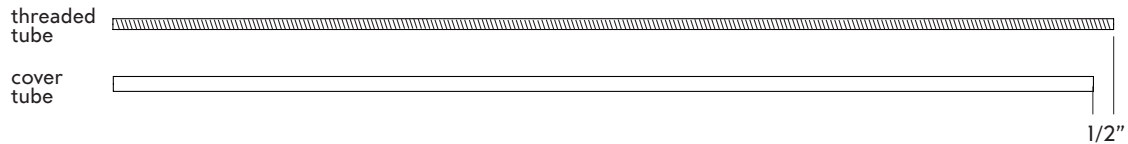

2. Feed wire from the fixture through the threaded rod. Thread the rod a quarter inch into the top hub of the fixture.

3. Slide the cover tube (B) over the threaded tube.

4. Secure the crossbar (A) to the junction box with the 8/32 J-Box screws as shown.

5. Make all final electrical connections between the mains power and the LED driver.

6. Raise driver plate (C) with hangstraight, threaded rod and fixture all connected to the standoffs protruding from the crossbar (A) and secure with screws provided.

7. Raise canopy to the ceiling line and tighten in place with threaded ring (D)

