



ORA

PENDANT

The Ora collection reflects a desire for purity and honesty in materials and manufacturing. Sitting between the timeless and the contemporary, the Ora pendant features a floating disk surrounded by a beautifully gentle glow.

Available in three sizes and various finish options, Ora is a versatile fixture designed to complement any number of interior settings, from the residential to the commercial and anywhere in between.


AVAILABLE FINISHES



TECHNICAL

MATERIAL	ANODISED OR PAINTED ALUMINIUM AND STEEL	SKU CODES	EG. ORP.M.A-CHM = ORA PENDANT Ø600 IN CHAMPAGNE ANODISED
LAMPING	ORP.S - 10.5W E27, 1080LM, 2700K, WARM WHITE, DIMMABLE. ORP.M - 13W E27, 1521LM, 2700K, WARM WHITE, DIMMABLE ORP.L - 3 X 13W E27, 1521LM, 2700K, WARM WHITE, DIMMABLE GLOBES ARE SUPPLIED WITH AUS/NZ ORDERS ONLY E27 LAMP HOLDER IS SUPPLIED FOR 240V REGION. E26 LAMP HOLDER IS SUPPLIED FOR 120V REGION.	ORP.S.X-XXX ORP.M.X-XXX ORP.L.X-XXX	ORA PENDANT IN Ø450 ORA PENDANT IN Ø600 ORA PENDANT Ø1000
LED LIFESPAN	15,000 HRS	FINISH	BLACK PAINTED (P-BLK) WHITE PAINTED (P-WHT) GREEN PAINTED (P-GRN) CHAMPAGNE ANODISED (A-CHM)* *(NOT AVAILABLE FOR ORP.L)
CONTROL	PHASE CONTROL / NETWORK CONTROL DIMMABLE DIMMING RANGE 10 - 100%. FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A ROTARY OR PUSH BUTTON DIMMER WITH AN ADJUSTMENT DIAL CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.	DIMENSIONS	ORP.S - Ø450 H 203 / Ø17.7X8" ORP.M - Ø600X265MM / Ø23.6X10.5" ORP.L - Ø1000X444MM / Ø39.4X17.5"
CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE	PRODUCT WEIGHT	ORP.S - 4KG / 8.8LB ORP.M - 5KG / 11LB ORP.L - 11KG / 39.7LB
CORD	2000 / 6.6' BLACK OR WHITE CLOTH (Ø450) OR 2M / 6.6' BLACK OR WHITE CLOTH AND SUSPENSION WIRE (Ø600 AND Ø1000). COLOUR TO MATCH CANOPY. NOTE: LONGER LENGTHS AVAILABLE UPON REQUEST	PACKAGING	ORP.S - L 500 W 500 H 250 / L 20" W 20" H 10" ORP.M - L 650 W 650 H 310 / L 26" W 26" H 12" ORP.L - L 1100 W 1100 H 600 / L 44" W 44" H 24"
IP RATING	IP20 - FOR INDOOR USE ONLY	PACKAGING WEIGHT	ORP.S - 5KG / 11LB ORP.M - 6KG / 13.2LB ORP.L - 23KG / 50.7LB
CERTIFICATION	AU/NZ EU US/CAN		AS/NZS 60598.1, 60598.2.1 EN 60598.1, 60598.2.1 ETL/UL 1598, CSA C22.2#250.0
		*NOTE:	ORA Ø1000 IS WIRED TO ETL/UL STANDARDS, HOWEVER DOES NOT HAVE ETL/UL CERTIFICATION (AVAILABLE UPON REQUEST).
			*ORA Ø1000 IS ONLY AVAILABLE IN PAINTED FINISHES

DIMENSIONS

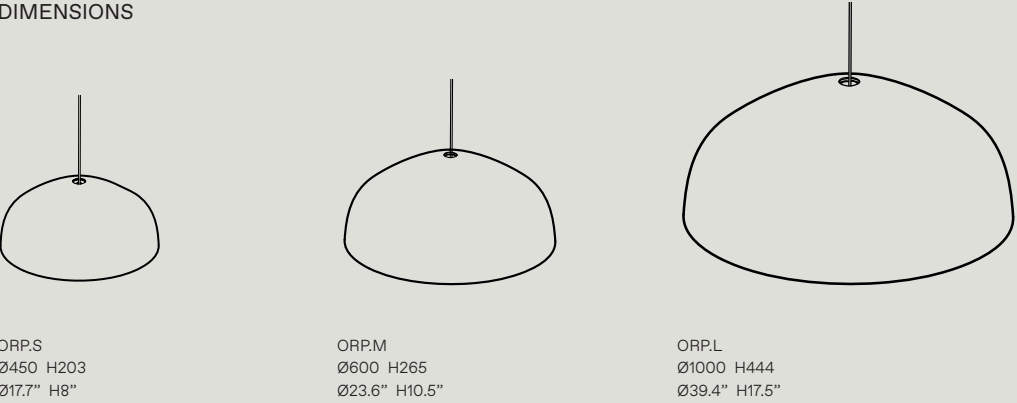

ORP.S
Ø450 H203
Ø17.7" H8"

ORP.M
Ø600 H265
Ø23.6" H10.5"

ORP.L
Ø1000 H444
Ø39.4" H17.5"

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED, THE STANDARD CANOPY (NON US/CAN REGION) OR LARGE CANOPY (US/CAN) WILL BE SUPPLIED.

ORA Ø450



STANDARD
SINGLE PENDANT CANOPY
CAN.ST.120.SP.X-XXX

Ø120 X 30MM / 4.7" X 1.2"

SLIM
SINGLE PENDANT CANOPY
CAN.SL.SP.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

PUCK
SINGLE PENDANT CANOPY
CAN.PK.SP.X-XXX

Ø50 X 65MM / 2" X 2.6"

ORA Ø600



STANDARD
SUSPENSION + FLEX CANOPY
CAN.ST.120.SF.X-XXX

Ø120 X 30MM / 4.7" X 1.2"

SLIM
SUSPENSION + FLEX CANOPY
CAN.SL.SF.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

PUCK
SUSPENSION + FLEX CANOPY
CAN.PK.SF.X-XXX

Ø50 X 65MM / 2" X 2.6"

ORA Ø1000

		
STANDARD - 120MM SINGLE PENDANT + EXTERNAL CEILING MOUNT CANOPY CAN.ST.120.SFCM.X-XXX	SLIM SINGLE PENDANT + EXTERNAL CEILING MOUNT CANOPY CAN.SL.SFCM.X-XXX	PUCK SINGLE PENDANT + EXTERNAL CEILING MOUNT CANOPY CAN.PK.SFCM.X-XXX
Ø120 X 30MM / 4.7" X 1.2"	Ø120 X 7MM / 4.7" X 0.3"	Ø50 X 65MM / 2" X 2.6"

MATERIAL	ANODISED ALUMINIUM / POWDERCOATED ALUMINIUM
	 BLACK ANODISED  CHAMPAGNE ANODISED  WHITE POWDERCOATED
CANOPY FINISH	ANODISED BLACK (A-BLK) ANODISED CHAMPAGNE (A-CHM) POWDERCOATED WHITE (C-WHT)
SKU CODES	EG. CAN.ST.120.SPA-CHM = STANDARD SINGLE PENDANT CANOPY IN CHAMPAGNE ANODISED FINISH