

Phaedra Sconce 34

Phaedra Sconces

Lead Time

8 - 10 weeks Standard Finsh 14 - 16 weeks Special Order

Dimensions

Indicated in the drawings above

Weight

23: 9 lb / 4.1 kg 34: 13 lb / 5.9 kg

LED Illumination

24 VDC T5 LED tube 2700 Kelvin 90 CRI Installation - Standard

Remote: Backplate mounts directly to standard US single gang box Local: Refer to installation diagram

Backplate

23: 3.5 x 23.2 inch / 89 x 590 mm in matching metal finish 34: 3.5 x 33.5 inch / 89 x 851 mm in matching metal finish

Electrical - Total

Wattage: 3 / 6 Watt Lumens: 240 / 480 110 - 240 VAC 277 VAC upon request

0-10V dimming upon request

Materials


Finished Brass Clear Glass Prism


Standard Finishes


Brushed Brass Oil-Rubbed Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass
Polished Nickel
Dark Pewter
Polished Black Nickel
Polished Copper
Smoky Copper
Medium Antique Brass







Phaedra Pendant 22

*Lead Time*14 - 16 weeks

Dimensions

9.4 inch x 1.8 inch x 22.4 inch H 239 mm x 46 mm x 569 mm H

Weight 7 lb / 3.2 kg

*LED Illumination*24 VDC T5 LED tube
2700 Kelvin
90 CRI

Electrical

Wattage: 6 Watt Lumens: 480 Lumens 110 - 240 VAC 277 VAC upon request Installation - Standard

Locally mounted driver
120V Dimming: C·L (Lutron) switching
240V Dimming: 0-10V wireless (Lutron Pico)
Canopy: 8 x 1.6255 inch (203 x 41 mm) round
in matching metal finish

Installation - Alternate

Remotely mounted driver
120V Dimming: C·L (Lutron) switching
240V Dimming: 0-10V hardwired
Canopy: 5 x 0.25 inch (127 x 6 mm) round
in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

1/8 IP all-thread stem clad in brass tubing with matching metal finish up to 35 inch / 890 mm length included with fixture.
Length up to 95 inches / 2415 mm available for additional cost.

Materials


Finished Brass Clear Glass Prism

Standard Finishes

Brushed Brass Oil-Rubbed Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass
Polished Nickel
Dark Pewter
Polished Black Nickel
Polished Copper
Smoky Copper
Medium Antique Brass

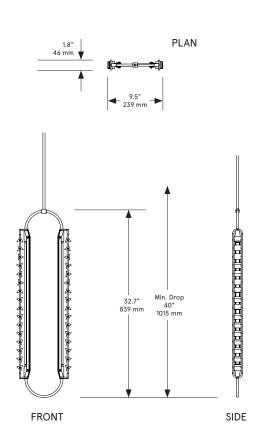



Phaedra Pendant 33

*Lead Time*14 - 16 weeks

Dimensions

9.4 inch x 1.8 inch x 32.7 inch H 239 mm x 46 mm x 831 mm H

Weight 10 lb / 4.5 kg

*LED Illumination*24 VDC T5 LED tube
2700 Kelvin
90 CRI

Electrical

Wattage: 12 Watt Lumens: 960 Lumens 110 - 240 VAC 277 VAC upon request Installation - Standard

Locally mounted driver
120V Dimming: C·L (Lutron) switching
240V Dimming: 0-10V wireless (Lutron Pico)
Canopy: 8 x 1.6255 inch (203 x 41 mm) round
in matching metal finish

Installation - Alternate

Remotely mounted driver
120V Dimming: C·L (Lutron) switching
240V Dimming: 0–10V hardwired
Canopy: 5 x 0.25 inch (127 x 6 mm) round
in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

1/8 IP all-thread stem clad in brass tubing with matching metal finish up to 35 inch / 890 mm length included with fixture.
Length up to 95 inches / 2415 mm available for additional cost.

Materials


Finished Brass Clear Glass Prism

Standard Finishes

Brushed Brass Oil-Rubbed Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper Medium Antique Brass

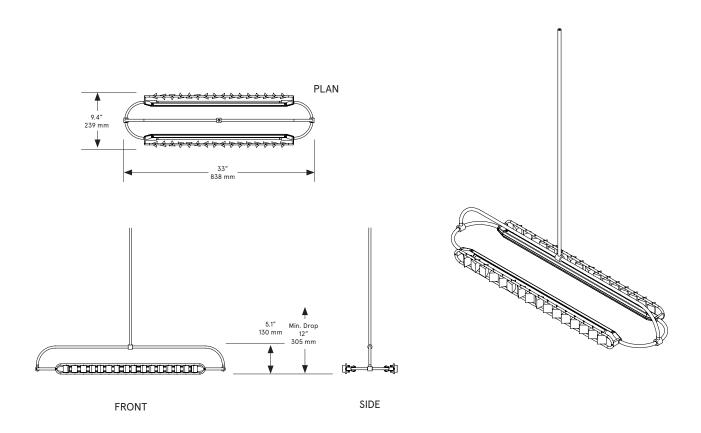

Phaedra Horizontal 33

*Lead Time*14 - 16 weeks

Dimensions

33 inch x 9.4 inch x 5.1 inch H 838 mm x 239 mm x 130 mm H

Weight

12 lb / 5.4 kg

LED Illumination

24 VDC T5 LED tube 2700 Kelvin 90 CRI

Electrical

Wattage: 12 Watt Lumens: 960 Lumens 110 - 240 VAC 277 VAC upon request Installation - Standard

Locally mounted driver
120V Dimming: C·L (Lutron) switching
240V Dimming: 0-10V wireless (Lutron Pico)
Canopy: 8 x 1.6255 inch (203 x 41 mm) round

in matching metal finish

Installation - Alternate

Remotely mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V hardwired Canopy: 5 x 0.25 inch (127 x 6 mm) round

in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

1/8 IP all-thread stem clad in brass tubing with matching metal finish up to 35 inch / 890 mm length included with fixture. Length up to 95 inches / 2415 mm available for additional cost.

Materials


Finished Brass Clear Glass Prism


Standard Finishes

Brushed Brass Oil-Rubbed Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass
Polished Nickel
Dark Pewter
Polished Black Nickel
Polished Copper
Smoky Copper
Medium Antique Brass

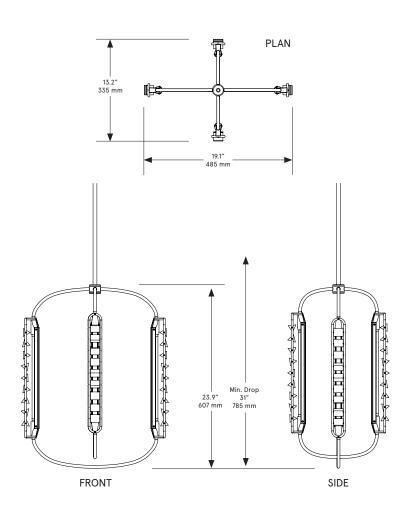

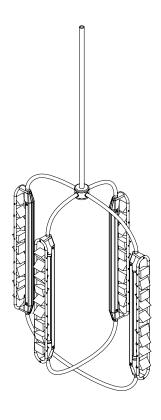

Phaedra Chandelier 19

Lead Time

14 - 16 weeks

Dimensions

19.1 inch x 13.2 inch x 23.9 inch H 485 mm x 335 mm x 607 mm H

Weight

16 lb / 7.3 kg

LED Illumination

24 VDC T5 LED tube 2700 Kelvin 90 CRI

Electrical

Wattage: 12 Watt Lumens: 960 Lumens 110 - 240 VAC

277 VAC upon request

Installation - Standard

Locally mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V wireless (Lutron Pico) Canopy: 8 x 1.6255 inch (203 x 41 mm) round

in matching metal finish

Installation - Alternate

Remotely mounted driver
120V Dimming: C·L (Lutron) switching
240V Dimming: 0–10V hardwired
Canopy: 5 x 0.25 inch (127 x 6 mm) round
in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

1/8 IP all-thread stem clad in brass tubing with matching metal finish up to 35 inch / 890 mm length included with fixture. Length up to 95 inches / 2415 mm available for additional cost.

Materials


Finished Brass Clear Glass Prism


Standard Finishes


Brushed Brass Oil-Rubbed Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper Medium Antique Brass



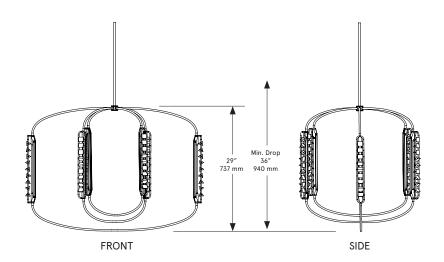



Phaedra Chandelier 41

Lead Time

14 - 16 weeks

Dimensions

41.1 inch x 28.1 inch x 29 inch H 1044 mm x 714 mm x 737 mm H

Weight

28 lb / 12.7 kg

LED Illumination

24 VDC T5 LED tube 2700 Kelvin 90 CRI

Electrical

Wattage: 18 Watt Lumens: 1440 Lumens 110 - 240 VAC

277 VAC upon request

Installation - Standard

Locally mounted driver 120V Dimming: C·L (Lutron) switching 240V Dimming: 0-10V wireless (Lutron Pico) Canopy: 8 x 1.6255 inch (203 x 41 mm) round

in matching metal finish

Installation - Alternate

Remotely mounted driver
120V Dimming: C·L (Lutron) switching
240V Dimming: 0-10V hardwired
Canopy: 5 x 0.25 inch (127 x 6 mm) round
in matching metal finish

Please inquire for detailed electrical specs

Suspension / Wiring

1/8 IP all-thread stem clad in brass tubing with matching metal finish up to 35 inch / 890 mm length included with fixture.
Length up to 95 inches / 2415 mm available for additional cost.

Materials

Finished Brass Clear Glass Prism

Standard Finishes

Brushed Brass Oil-Rubbed Bronze Satin Nickel Nickel Brass Contrast

Special Order Finishes

Polished Brass Polished Nickel Dark Pewter Polished Black Nickel Polished Copper Smoky Copper Medium Antique Brass